
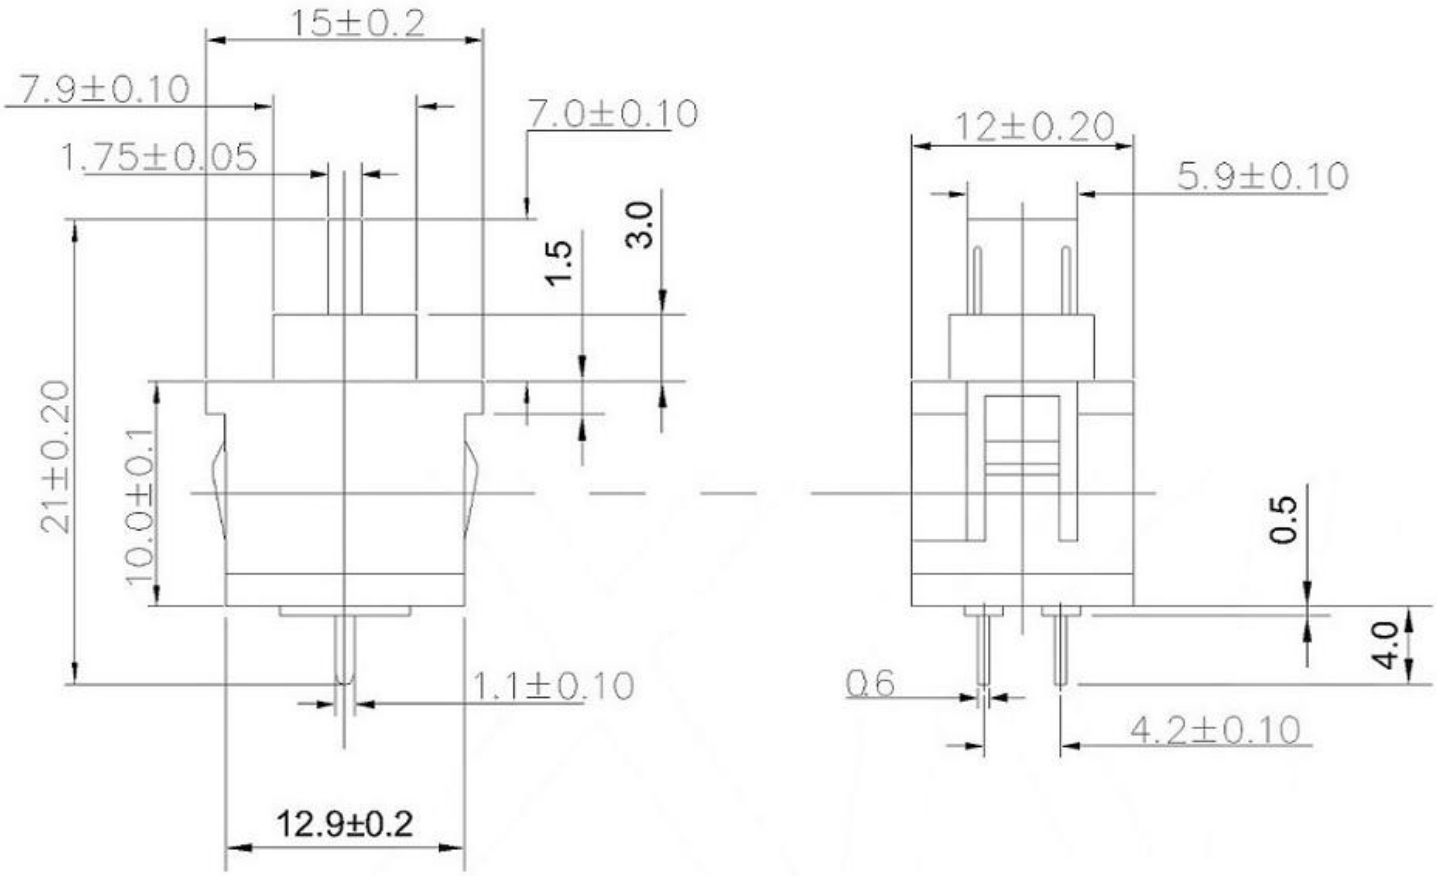
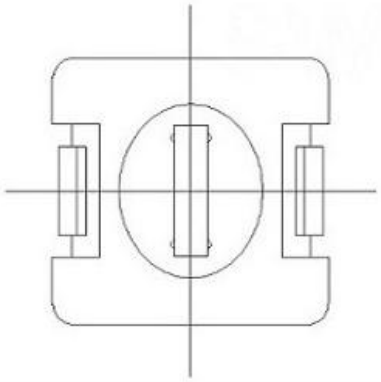


2P ON-OFF



**■ SPECIFICATIONS**

**1.ELECTRICAL**

| | |
|---|---|
| • Contact rating | 0.1A, 30VDC |
| • Contact resistance | 50mWMax. |
| • Insulation resistance | 100MWMin. at 250VDC |
| • Dielectric strength | 250VAC Min. for 60 sec. |

| ITEM | PAPT NAMF | TER.NO | QTY | MATERIAL | FINISHING | REMARK |
|---|---|---|---|---|---|---|
| ⑤ | Terminal | — | 2 | Brass | ag Plated | — |
| ④ | Contact | — | 2 | Phosphor Bronze | ag Plated | — |
| ③ | Base | — | 1 | Poly | | — |
| ② | Cover | — | 1 | Pa66 | | — |
| ① | Keystake | — | 1 | Daicel | | — |

| MARK | DESCRIPTION | DATE | REVISED | APPROVED |
|---|---|---|---|---|
| △X | | | | |
| △X | | | | |
| △X | | | | |

REVISIONS

| | |
|---|---|
| ANGLAR | ±5° |
| X.X | ±0.2mm |
| X.XX | ±0.1mm |
| X.XXX | ±0.05mm |

UNSPECIFIED TOLERANCES

| | | | | |
|---|---|---|---|---|
| DSND | | DATE | | SCALE: N/A |
| DWN | | DATE | | VIEW: |
| CHKD | | DATE | | UNIT: mm |
| APPD | | DATE | | SIZE: A4 |

KOSOD TECHNOLOGY CO., LTD

MODEL TYPE: KEY SWITCH

PART NO.:

DWG NO.: KSD11E01

| WEIGHT | SHEET | REVISION |
|---|---|---|
| 1.0g | 1/1 | A0 |

www.bodongkaiguan.net www.ksdkg.com