



RoHS

REV	ECN NO	DESCRIPTION	DATE	NAME
A		NEW		

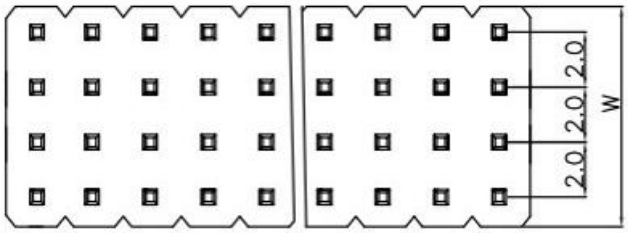

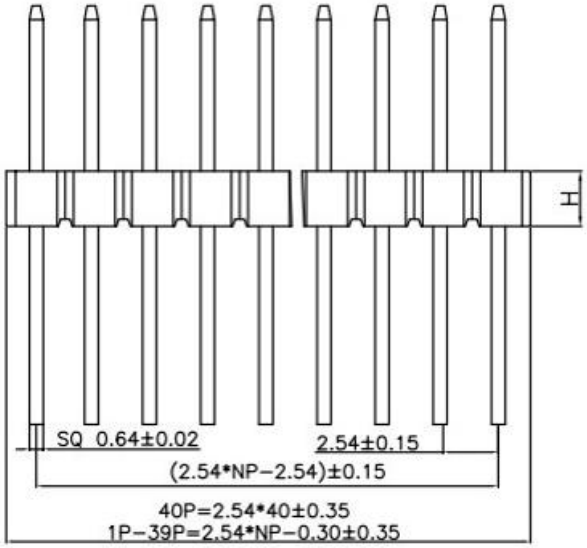

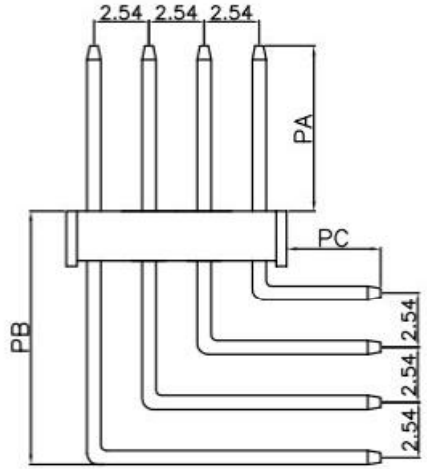

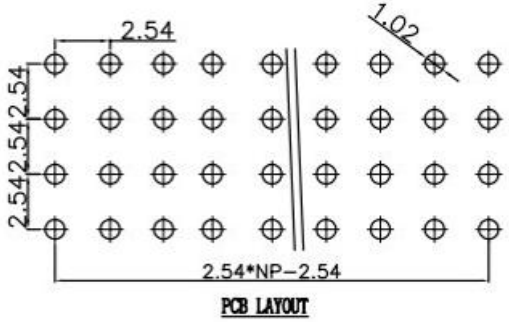

PCB LAYOUT

Specifications
1.Current Rating:3.0Amps
2.Insulation Resistance:1000 MΩ min.
3.Dielectric withstanding Voltage:1000V AC/DC
4.Contact Resistance:20 mΩ max.
5.Operating Temperature:−40℃ to+105℃
6.Contact Material: Brass
7.Insulation Material:Asfollows,UL94V−0,Black
8.Plated: Au Over Ni

Ordering Information

Insulation Height*Wide (H*W) Option: 25=2.54*10.04	NO. of Pins Per Row: 1-50P	Insulation Material Option: 1=PBT 2=PPS 3=NY6T 4=LCP 5=NY66 6=Customized 7=NY46 8=NY9T	Contact Plating 0=0.8" Gold 1=Au1" Gold 2=Au1.5" Gold 3=Au2" Gold 4=Au3" Gold 5=Au5" Gold 6=Customized 7=Gold/Tin 8=Tin	Serial NO. 01-69	Packing A=PE Bag B=Tube C=Tray D=Reel

Dimension antitheses list					
ITEM	PC	PB	PA	H	Pin Length
Standard	3.00	11.80	4.00	2.54	14.4/19.4/24.4
Alternate					

STANDARD TOLERANCE (EXCEPT SPECIFIED)			
LINER		ANGLES	
.0	±0.30	0.°	±3°
.00	±0.20	.0°	±2°
.000	±0.10	.00°	±1°

广东科斯达电子科技有限公司

TITLE	PH2.54mm Pin Header Four lines 90°	DRAWN BY	YTT	16.02.03
PART NO		CHECKED BY		
DRAWING NO		APPROVED BY		
SCALE 1:1	UNIT mm	PAGE 1/1	SIZE A4	