




SCHEMATIC	
MODEL NO.	C

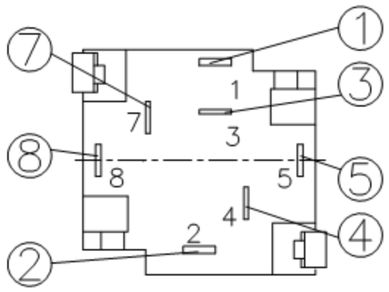

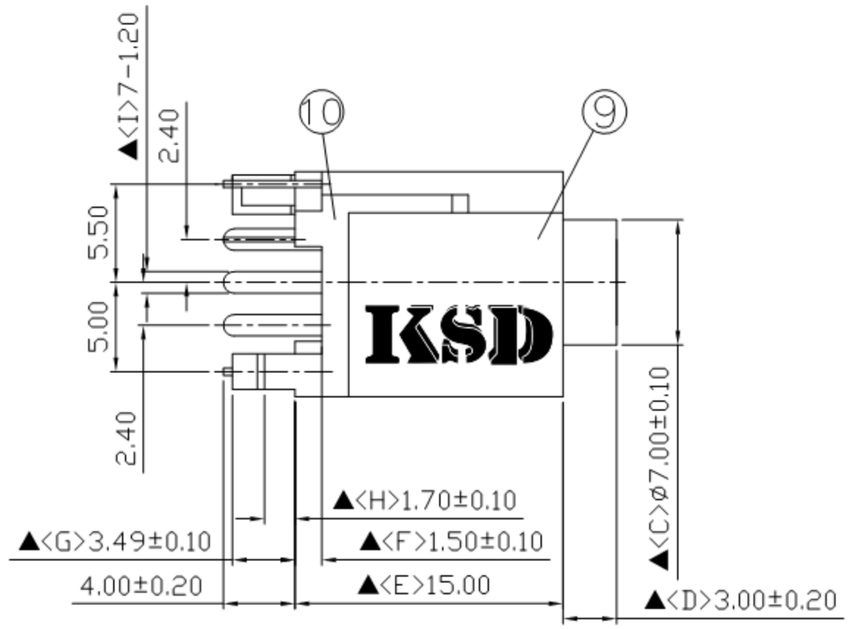

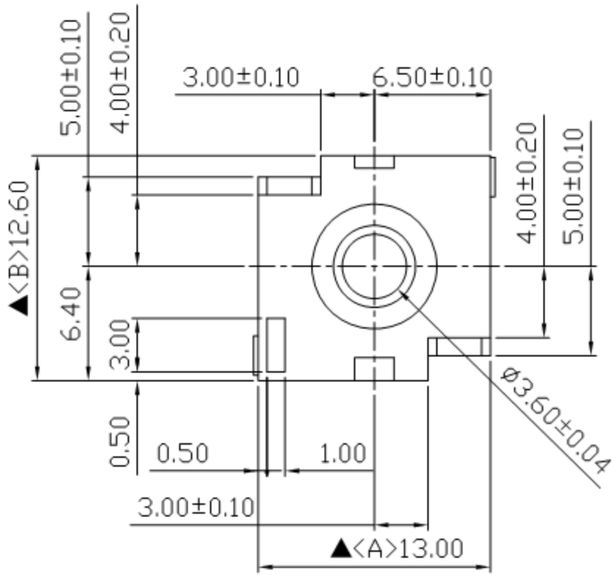

NO.	Description	Material	Q'TY	Finish
10.	Back Cover	PBT	1	Black Color
9.	Housing	PBT	1	Gray Color
8.	Break Terminal	0.25T Phosphor Bronze	1	Silver Plated
7.	Separator Terminal	0.3T Brass	1	Silver Plated
6.	Insulator	POM	2	White Color
5.	Break Terminal	0.25T Phosphor Bronze	1	Silver Plated
4.	Separator Terminal	0.3T Brass	1	Silver Plated
3.	Ring Spring	0.25T Phosphor Bronze	1	Silver Plated
2.	Tip Spring	0.35T Phosphor Bronze	1	Silver Plated
1.	Earth Spring	0.25T Phosphor Bronze	1	Silver Plated

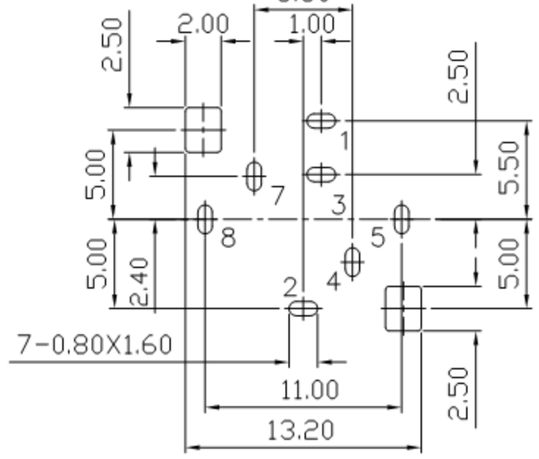

Pin Hole Layout
(Jack Bottom View)

广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	DATE	DWN	CHKD	APVD	MANAGER
	09.16.2020	王平華			

PART NAME : 3.5ø PHONE JACK	PART NUMBER : SCJ340P00CS0A00G	VERSION:6.0
TOLERANCE : ±0.3mm UNLESS OTHERWISE SPECIFIED	UNIT:mm	SCALE:/

For Reference 僅供參考

RoHS&SVHC Compliant

SPECIFICATIONS:
Contact Resistance : 30mΩ max
Insulation Resistance : 100MΩ min. at DC 500V
Dielectric Withstand Voltage : AC 500V for one minute
Remark: ▲: The Most Important Dimension