


CUSTOMER DRAWING


REV.	DESCRIPTION	APPROVED BY	DATE	ECN NO.
A	RELEASE	Ku Chou	02/05/18'	
B				
C				




PIN CONFIGURATION

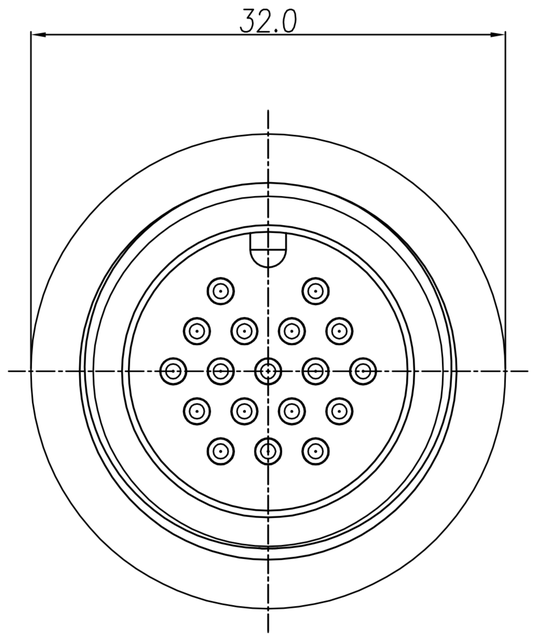


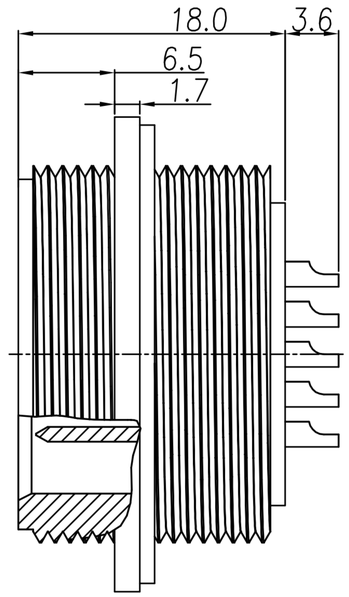

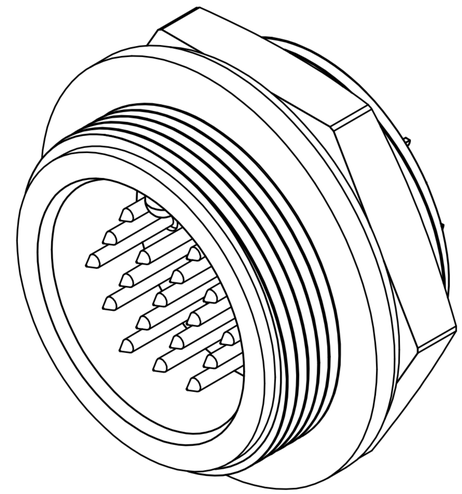


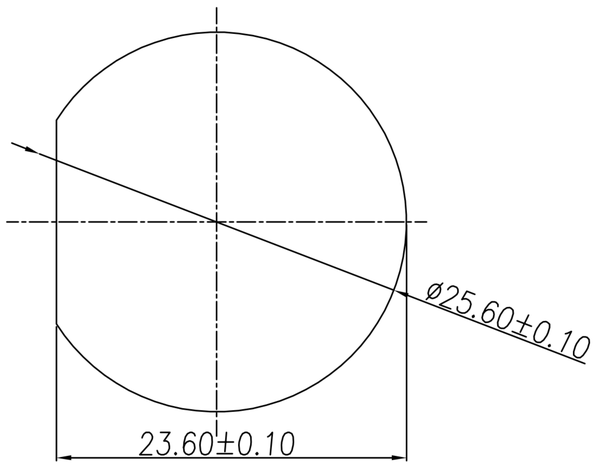

RECOMMEND PANEL HOLE

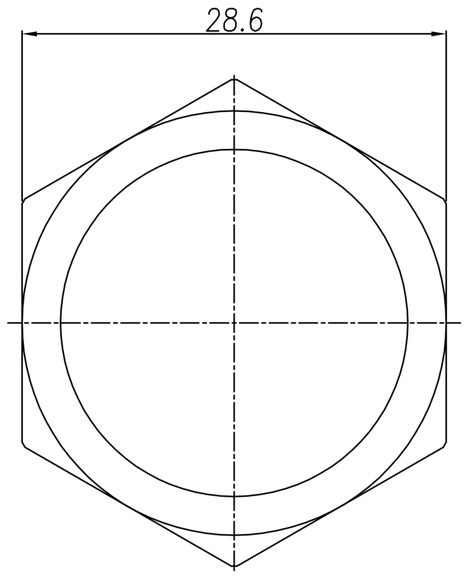

Hex Nut



1. MATERIAL :
   1-1. HOUSING : PA66
   1-2. CONTACT : BRASS
   1-3. GASKET : SILICONE
   1-4. HEX NUT : PA66
2. FINISH :
   2-1. CONTACT : GOLD FLASH PLATED
3. ELECTRICAL SPECIFICATION :
   3-1. Rated current : 5A
   3-2. Rated Voltage : 300V
4. Environmental :
   4-1. Operation Temperature : -40℃~105℃

DRAWN	Yeh Chou	APP'D	KU Chou	UNIT	mm	TOLERANCE .x ±0.20 .xx ±0.10 .xxx ±0.05 .xxxx ±0.03 ANGULA ±1°	广东科斯达电子科技有限公司 GUANG DONG KE SI DA ELECTRONIC TECHNOLOGY CO., LTD.	TITLE	D SIZE 18PIN(M) 後鎖螺牙杯口焊線式 (圓型檔板)		SHEET 1/1
CHK'D	KU Chou			SCALE	1:1			PART NO.	WP-18M2-15-11	DWG NO. QC8513	VERSION A